




Stratos® Aspirating Smoke Detector Input Relay Card

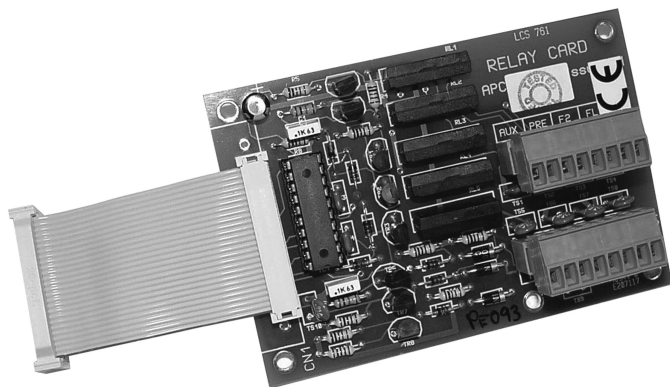

Features

- Four staged normally open relay outputs for unmonitored connection to other systems.
- Relay contacts rated at 0.4A @24VDC.
- Compatible with Stratos and Stratos-Micra detectors.
- Common Fault relay energized normally closed for fail safe operation.

Description

Stratos Input Cards are designed to provide additional relay outputs when interfacing to other systems.

Input Relay Cards plug into the APIC interface slot in each detector and cannot be used in conjunction with APIC Cards.

An Input Relay Card provides detector inputs that may be programmed for Remote Day/Night Mode Changeover, Remote Reset or ClassiFire Override as well as power supply fault monitoring.

ClassiFire Override is a particularly useful feature that enables the normal detector sensitivity to be reduced by a pre-programmed percentage to avoid unwanted alarms from a predictable event such as theater stage effects or open fires in heritage buildings.

Applications

Stratos Input Relay Cards have been successfully applied to enhance interfacing flexibility to many systems worldwide, in environments ranging from Cathedrals to Waste Recycling Centers.

Dimensions

3.94 in.(W) x 2.67 in.(H) (100 mm x 68 mm)

Ordering Information

Part No.	Description
30431	Standard 4 Relay Card
30436	Input Relay Card

