
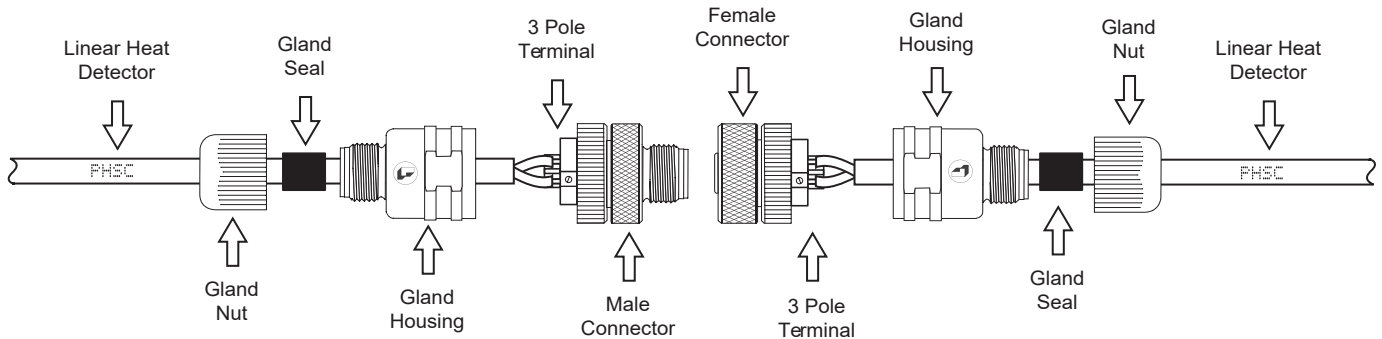



# Protectowire Linear Heat Installation Accessories

## Part#: PWSK-3



### Field Serviceable Connector.

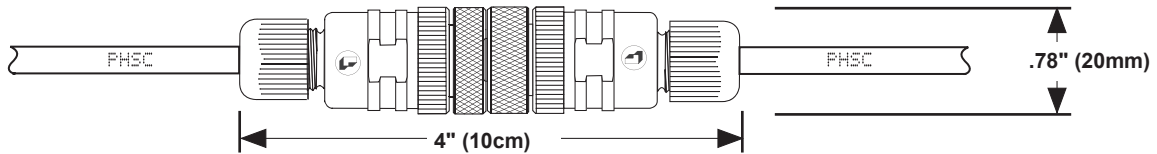

**Male, 3-Pole**



**Female, 3-Pole**

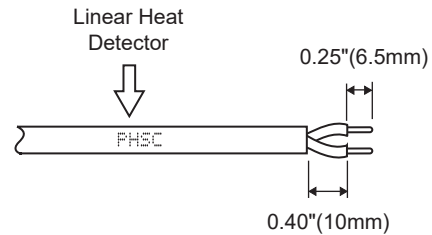

### Information

- Materials:
  - Housing Body, Gland Housing and Nut - Nylon
  - Contact - Brass tin-plated
  - Coupling Nut - Brass nickel-plated
  - O-Ring - FKM rubber
- Temperature: Rated at -13°F (-25°C) / 194°F (90°C)
- Cable Diameter Range: 0.12" to 0.25" (3mm to 6.5mm)
- Rating: NEMA 6P / IP 67
- Mode of Connection: Screw terminals
- Connectable Conductor : 18 AWG/ 0.75 mm<sup>2</sup>
- For use with PHSC and PLR type detectors