


## Protectowire Linear Heat Installation Accessories

**Part#: MS 3091T**

**Retractable Cable**

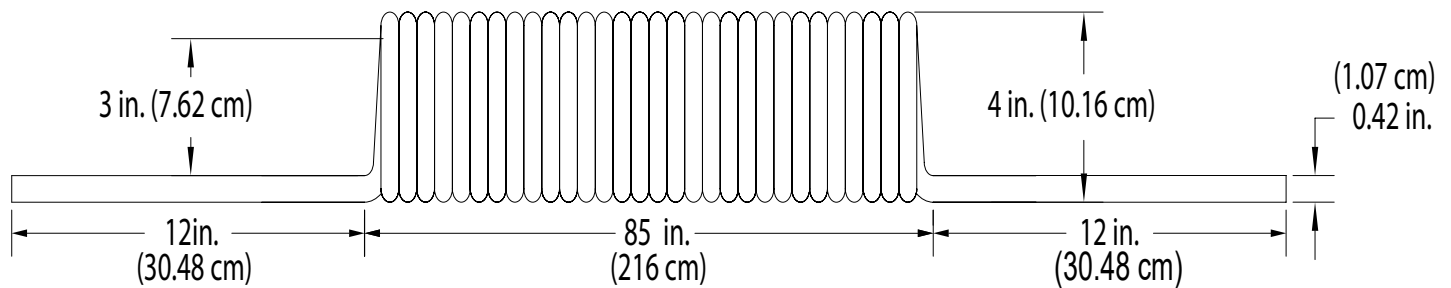

**MAXIMUM EXTENSION - 99 FT. (30 M)**

**RATIO: 14 to 1**

\*Dimensions shown for reference only. Actual measurements may vary.

### Information

- Retractable cable compatible with PHSC and CTI Series Linear Heat Detector. Recommend used with strain relief connector model SR-505.
- Material: 4 conductor 20 AWG stranded type "TX" thermocouple twisted pairs.
- Color & Pairing: Red (Constantan) with Blue (CU); Orange (Constantan) with LT BLUE (CU)
- Temperature: -40°F (-40°C) to 221°F (105°C)
- UV, corrosion and weather resistant
- ISA RP 12.6 Cable Inductance: 32uH; Cable Capacitance 9.6nF
- Cable is not recognized or approved for penetration from non-hazardous (classified area) into a hazardous area.